


SAIL®

4 stroke 5HP outboard motor F5B

Model number	F5B
Max.output	3.7KW/5HP
Max.Speed	4500-5500RPM/MINS
Stroke	4
Cylinder	1
Displacement (CC)	139CC
Bore x Stroke mm(in)	62x46(2.44x1.81)
L x W x H (mm)	S: 1040x333x750 , L:1168x333x750
Ignition System	CDI
Starting System	Recoil start
Control System	Tiller handle
Compression Ratio	8.4:1
Gear Ratio	2.08(27:13)
Gear Position	F-N-R
Gear oil capacity	130+ ml
Water cooling system	Water cooling
Oil Capacity(ML)	600
Net Weight (KGS)	Short shaft: 27, Long shaft:28
Fuel Capacity	Built-in Fuel tank:1.1L or Extra 12L & Fuel hose (<i>Option cost</i>)
Propeller(standard)	3 - 7 1/7x7-B
ALL RIGHTS RESERVED BY SAIL MOTOR	



F5B,F6 Components Diagram

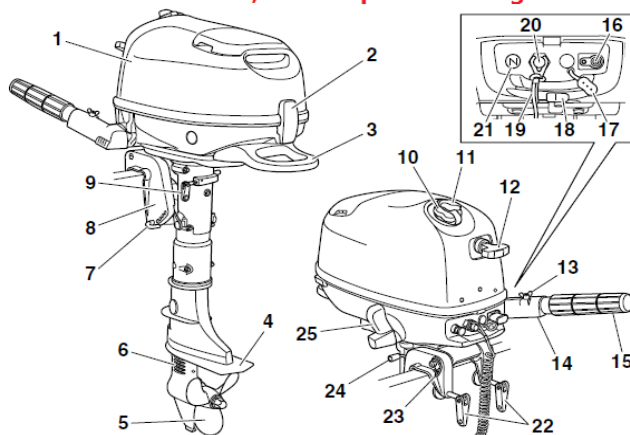

1. Top cowling
2. Cowling lock lever
3. Carrying handle
4. Anti-cavitation plate
5. Propeller
6. Cooling water inlet
7. Trim rod
8. Clamp bracket
9. Steering friction adjuster
10. Fuel tank cap
11. Air vent screw
12. Manual starter handle
13. Throttle friction adjuster
14. Tiller handle
15. Throttle grip
16. Fuel joint
17. Fuel joint cap
18. Fuel cock
19. Engine shut-off cord (lanyard)
20. Engine stop button/Engine shut-off switch
21. Choke knob
22. Clamp screw
23. Restraint cable attachment
24. Tilt support bar
25. Gear shift lever

SAIL Professional outboard motor manufacturer since 1995

SAIL TO BETTER LIFE!



SAIL®